


Components

Date 23/02/00 Page 3 of 3

INDUSTRIAL 500 - 3 - Section Push Up

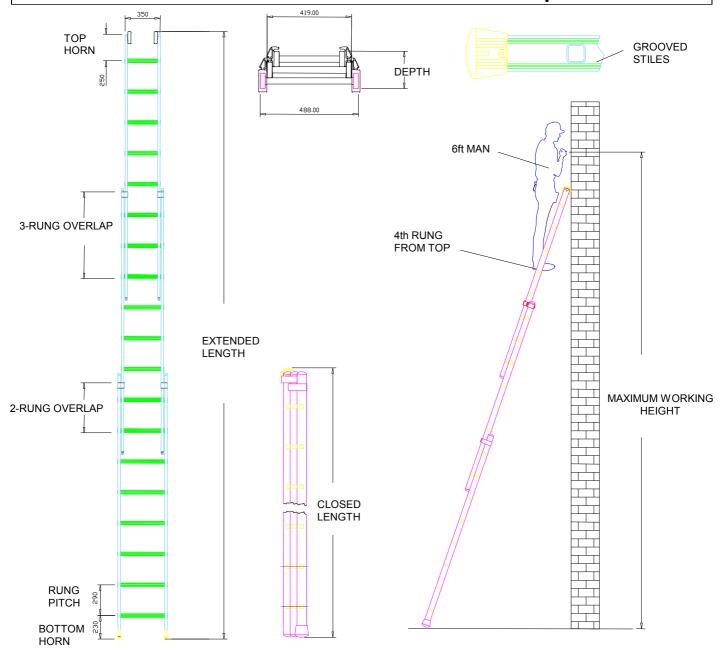

<u>Technical Data</u> - Duty Rating: 130kg

Maximum Static Vertical Load: 175kg

C	Code	Nominal	No. of	Closed	Extended	Working	Stile Size (mm)	Stile Material	Depth	Boxed	Weight	Packing Size
		Size	Rungs	Length	Length	Height			(mm)	Volume	(kg)	(mm)
		(m)		(mm)	(mm)	(mm)				(m3)		
57	70322	3.10	10	3115	7465	7707	84 x 25 x (1.45/1.80)	Aluminium Alloy -	203.00	0.308	23.47	3107 x 488 x 203
								Extruded				
57	70323	3.69	12	3695	9205	9342	84 x 25 x (1.80/2.65)	Aluminium Alloy -	203.00	0.365	33.45	3687 x 488 x 203
								Extruded				

<u>Technical Data</u> - Duty Rating: 130kg

Maximum Static Vertical Load: 175kg
Sections interlocked by top and bottom clips
Rubber serrated feet tagged into end of stile
Blue rubber Overboot on bottom end
Blue Wall wheels at top end

Square rungs (35mm sq) - Ends are expanded and riveted into stiles Material for rungs: Seam Welded Aluminium Alloy.

Classification: Approved to BS 2037:1994 Class 1